

OPzS Deep Cycle Tubular Flooded Battery

OPzS2-2000

CSPower OPzS series is flooded Lead Acid battery that adopts Tubular Plate technology to offer high reliability and performance. The Battery is designed and manufactured according to standards and with DIN40736-2/IEC60896-11 positive spine and patent formula of die-casting active material. OPzS series exceeds standard values with more than 20 years floating design even more suitable for life at 25°C and is cyclic use(PV/solar, traction etc) under extreme operating conditions.

2V
2000Ah

Flooded
Technology

Tubular
Plate




Applications

- Solar & Wind Power system
- Nuclear power station
- Telecom backup power supply
- energy saving requirements
Emergency Power System

General Features

- ✓ It can discharge at -40°C-70°C, Charge at 0-50°C
- ✓ Long life expectancy of 20+ years in floating condition
- ✓ Adopts quality silicon nano gel electrolyte
- ✓ Excellent deep discharge recovery capability
- ✓ Deep cycle performance: up to 3300

Dimensions & Weight

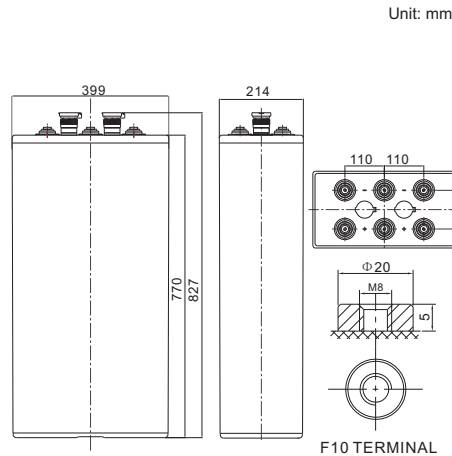

Length	399±1mm (15.7 inches)
Width	214±1mm (8.43 inches)
Height	770±1mm (30.3 inches)
Total Height	827±1mm (32.6 inches)
Torque Value	10~12 N*m

Technical Specifications

Cells Per Unit	1
Voltage Per Unit	2
Nominal Capacity	2000Ah@10hr-rate to 1.85V per cell @25°C
Weight	Without Electrolyte 112.8kg/With Electrolyte 153.4kg
Internal Resistance	Approx. 0.17 mΩ
Terminal	F10(M8)
Max. Discharge Current	7500A (5 sec)
Design Life	20 years (floating charge)
Maximum Charging Current	200.0 A
Reference Capacity	C24 2394.0AH C48 2644.8AH C72 2777.0AH C100 2840.7AH C120 2897.5AH C240 2946.0AH
Float Charging Voltage	2.23 V~2.25 V @ 25°C Temperature Compensation: -3mV/°C/Cell
Cycle Use Voltage	2.40 V~2.45 V @ 25°C Temperature Compensation: -4mV/°C/Cell
Operating Temperature Range	Discharge: -15°C~50°C Charge: 0°C~40°C Storage: -15°C~50°C
Normal Operating Temperature Range	25°C ± 5°C
Self Discharge	Valve Regulated Lead Acid (VRLA) batteries can be stored for up to 6 months at 25°C and then recharging is recommended. Monthly Self-discharge ratio is less than 3.5% at 25°C. Please charged batteries before using.
Container Material	A.B.S. UL94-HB, UL94-V0 Optional.

Battery Discharge Table









Discharge Constant Current per Cell (Amperes at 25° C)

F.V/ Time	30min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.90V	1064	843.6	594.8	453.4	359.1	319.2	279.3	218.0	186.9	107.49
1.87V	1190	930.1	638.1	482.7	379.1	337.6	296.1	228.1	195.3	112.3
1.83V	1363	1038	692.2	516.3	399.0	352.8	306.6	238.3	203.7	117.1
1.80V	1514	1125	718.1	531.4	407.0	361.0	315.0	244.4	210.0	120.7
1.75V	1687	1205	750.6	548.4	413.7	367.5	321.3	248.5	214.2	123.1
1.70V	1860	1244	772.2	561.4	420.9	373.2	325.5	250.6	216.3	124.4
1.65V	1919	1322	798.1	575.4	426.9	378.3	329.7	252.6	218.4	125.6
1.60V	2001	1367	828.4	594.7	438.9	386.4	333.9	254.6	220.5	126.8

Discharge Constant Power per Cell (Watts at 25° C)

F.V/ Time	30min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.90V	2037	1619	1150	881.7	702.8	627.4	552.3	435.9	380.9	219.0
1.87V	2241	1759	1220	932.3	740.8	662.3	583.8	454.3	397.2	228.4
1.83V	2511	1917	1298	985.1	776.7	689.7	602.7	470.5	411.5	236.6
1.80V	2743	2046	1341	1011	791.4	704.6	617.4	480.7	421.7	242.5
1.75V	2976	2137	1385	1035	802.0	714.9	627.9	486.8	427.8	245.9
1.70V	3191	2159	1420	1057	814.7	724.6	634.2	490.9	431.8	248.3
1.65V	3246	2254	1459	1079	825.2	732.6	640.5	495.0	433.9	249.5
1.60V	3285	2324	1493	1105	846.3	745.7	644.7	497.0	435.9	250.6

Performance Characteristics

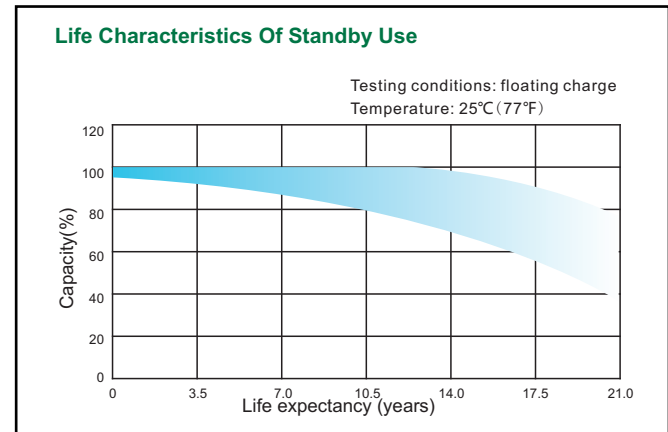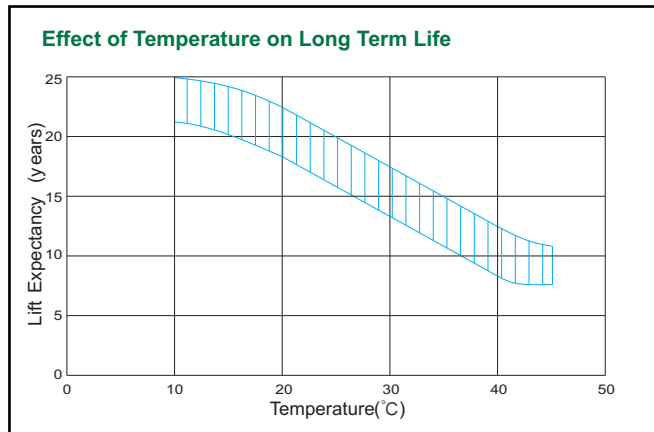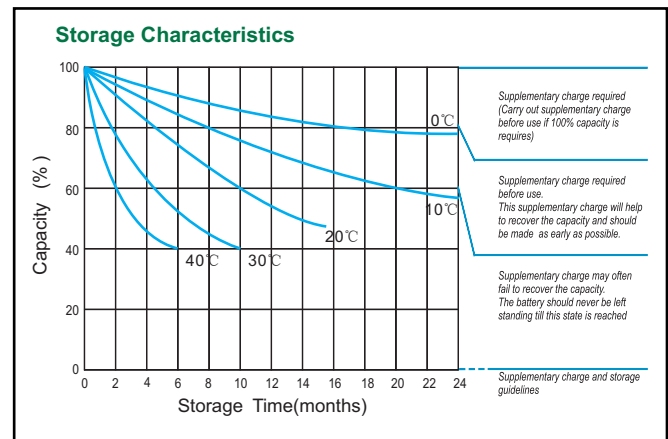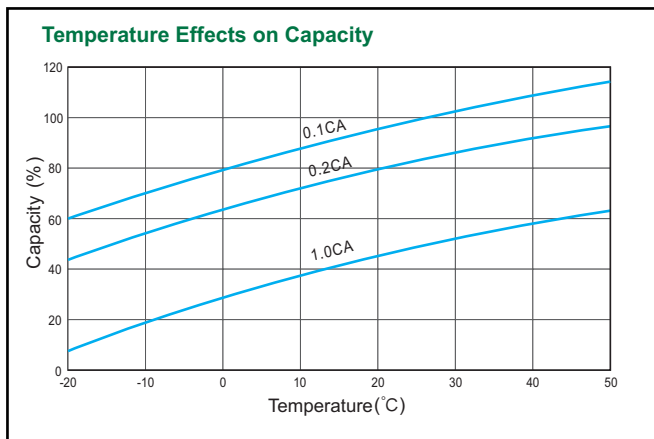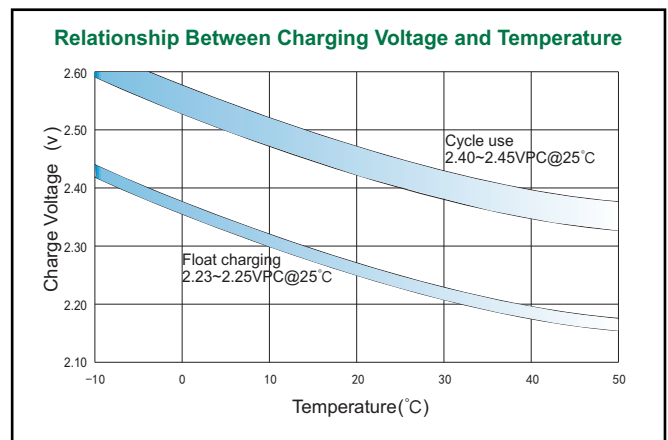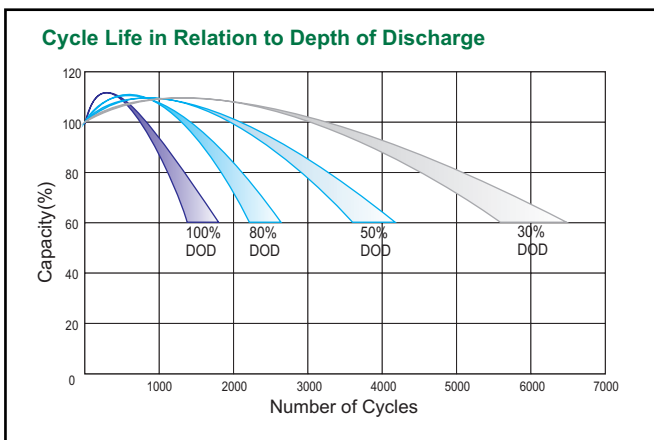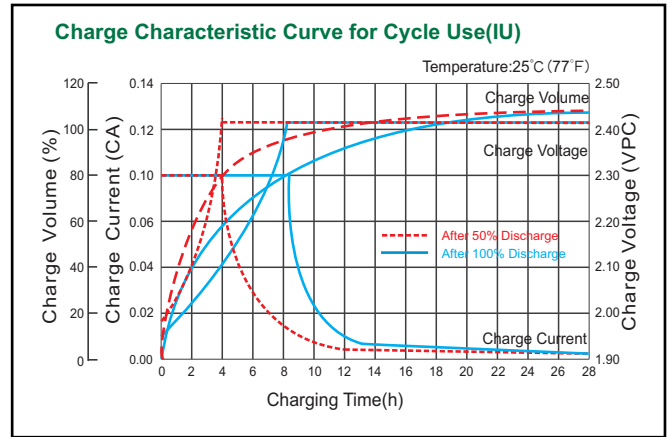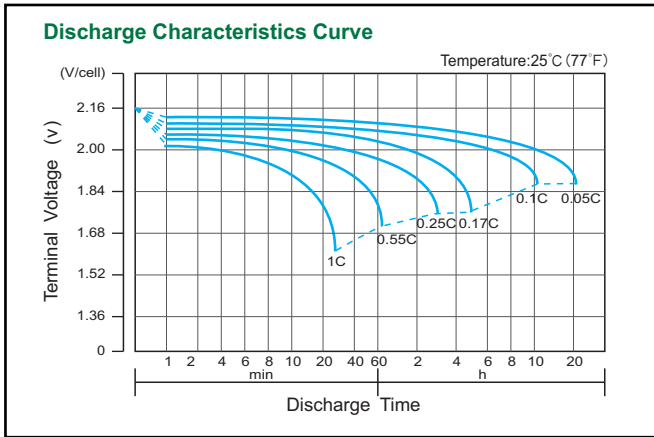

Note: The above data are average values, and can be obtained within 3 charge/discharge cycles. These are not minimum values. Cell and battery designs/specifications are subject to modification without notice. Contact **CSPower** for the latest information.

CSPower Battery Tech Co., Ltd.

Add: Floor 3, Evolution Space, NO.61, Liuxian 2nd Road, Baoan, Shenzhen, China

Tel: +86-755-29123661 Email: sales@csppowerbattery.com