

# OPzV Tubular GEL Battery

# OPzV2-2500

CSPower OPzV series Tubular GEL battery is with 25 years floating design life, it is a Valve Regulated Tubular Gel battery that adopts immobilized GEL and Tubular Plate technology to offer high reliability and performance. The Battery is designed and manufactured according to DIN standards and with die-casting positive grid and patent formula of active material. OPzV series exceeds DIN standard values with more than 25 years floating design life at 25°C and is even more suitable for cyclic use under extreme operating conditions.

<b>2V</b> Voltage	<b>2500Ah</b> Capacity	<b>Tubular</b> Technology	<b>GEL</b> Battery
----------------------	---------------------------	------------------------------	-----------------------



### COMPLIED STANDARDS



### GENERAL FEATURES

- It can discharge at -40°C-70°C, Charge at 0-50°C
- Long life expectancy of 20+ years in floating condition
- Adopts quality silicon nano gel electrolyte
- Excellent deep discharge recovery capability
- Deep cycle performance: up to 3300 cycles @50% DOD


### APPLICATIONS

- Solar & Wind Power system
- Nuclear power station
- Telecom backup power supply
- energy saving requirements
- Emergency Power Systems

### DIMENSIONS & WEIGHT

Length(mm/inch)	487/19.2
Width(mm/inch)	212/8.35
Height(mm/inch)	792/31.2
Total Height(mm/inch)	807/31.8
Weight(kg/lbs)(+3%)	189/417

Unit: mm Dimension: 487(L) × 212(W) × 807(H)

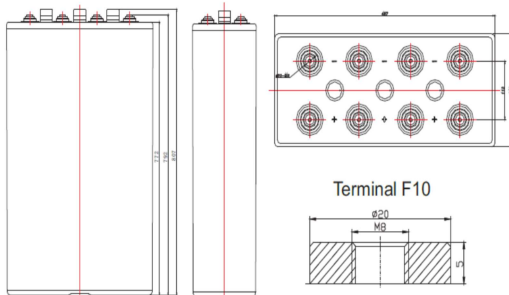

### TECHNICAL SPECIFICATIONS

Nominal Voltage		2V(Single Cell)
Design Floating Life @25°C		25 Years
Nominal Capacity @25°C(10 hour rate@250.0A,1.8V )		2500Ah
Capacity @25°C	20hour rate (131.3A,1.8V )	2626Ah
	5 hour rate (425A,1.75V )	2125Ah
	1 hour rate (1580A,1.6V )	1580Ah
Internal Resistance	Full Charged Battery@25°C	≤0.20mΩ
Ambient Temperature	Discharge	-40°C~70°C
	Charge	-0°C~50°C
	Storage	-20°C~60°C
Max.Discharge Current@25°C		10000A (5s)
Capacity affected by Temperature (10 hour )	40°C	105%
	25°C	100%
	0°C	89%
	-15°C	79%
Self-Discharge@25°C per Month		2%
Charge (Constant Voltage) @25°C	Standby Use	Initial Charging Current Less than 500.0A Voltage 2.25-2.3V
	Cycle Use	Initial Charging Current Less than 500.0A Voltage 2.37-2.4V

### BATTERY DISCHARGE TABEL

### Discharge Constant Current per Cell (Amperes at 25°C)

F.V/ Time	30min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.90	1230.0	975.0	687.5	521.4	427.5	369.4	332.5	259.5	222.5	116.8
1.87	1375.0	1075.0	737.5	552.9	451.3	388.6	352.5	271.6	232.5	122.1
1.83	1575.0	1200.0	800.0	589.3	475.0	405.4	365.0	283.7	242.5	127.3
1.80	1750.0	1300.0	830.0	606.3	484.5	415.0	375.0	291.0	250.0	131.3
1.75	1950.0	1393.0	867.5	630.5	492.5	425.0	382.5	295.9	255.0	133.9
1.70	2150.0	1438.0	892.5	642.6	501.1	430.0	387.5	298.3	257.5	135.2
1.65	2218.0	1528.0	922.5	660.0	508.3	435.0	392.5	300.7	260.0	136.5
1.60	2313.0	1580.0	957.5	687.5	522.5	442.5	397.5	303.1	262.5	137.8







### Discharge Constant Power per Cell (Watts at 25°C)

F.V/ Time	30min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.90	2354.0	1872.0	1329.0	1010.0	836.7	727.5	657.5	519.0	453.5	238.1
1.87	2590.0	2033.0	1410.0	1058.0	881.9	762.5	695.0	540.8	472.9	248.3
1.83	2902.0	2216.0	1500.0	1113.0	924.6	792.5	717.5	560.2	489.9	257.2
1.80	3171.0	2364.0	1550.0	1138.0	942.2	810.0	735.0	572.3	502.0	263.5
1.75	3440.0	2470.0	1600.0	1173.0	954.8	830.0	747.5	579.6	509.3	267.4
1.70	3688.0	2495.0	1641.0	1193.0	969.8	837.5	755.0	584.4	514.1	269.9
1.65	3751.0	2605.0	1686.0	1219.0	982.4	845.0	762.5	589.3	516.5	271.2
1.60	3796.0	2686.0	1726.0	1259.0	1008.0	852.5	767.5	591.7	519.0	272.4

# OPzV Tubular GEL Battery

# OPzV2-2500

## PERFORMANCE CHARACTERISTICS

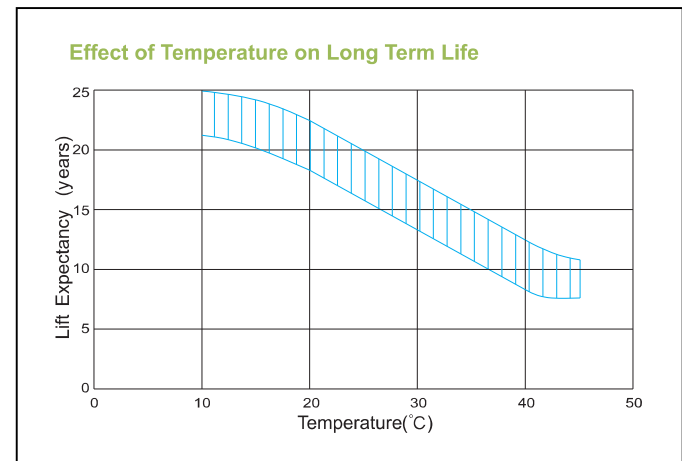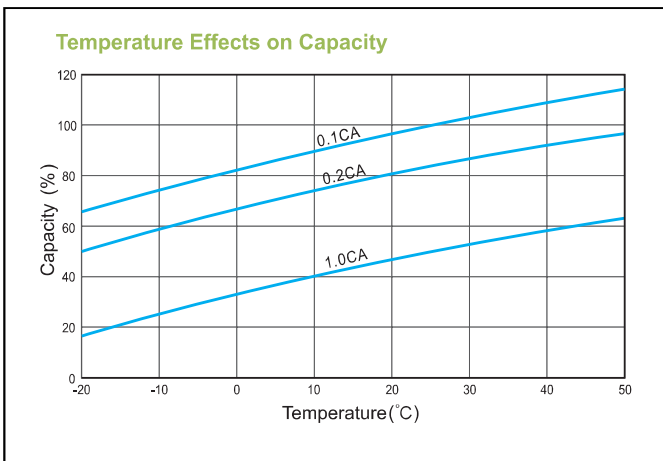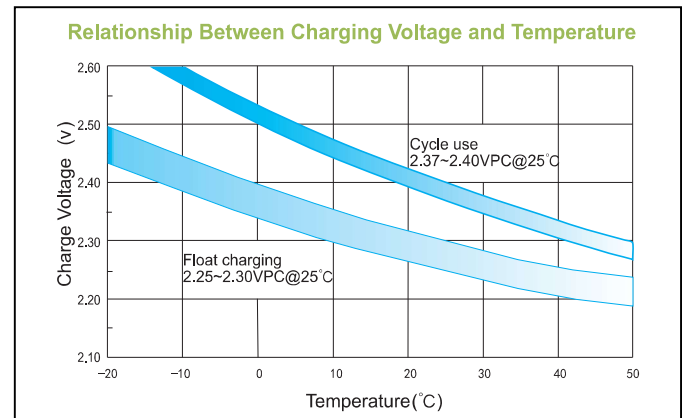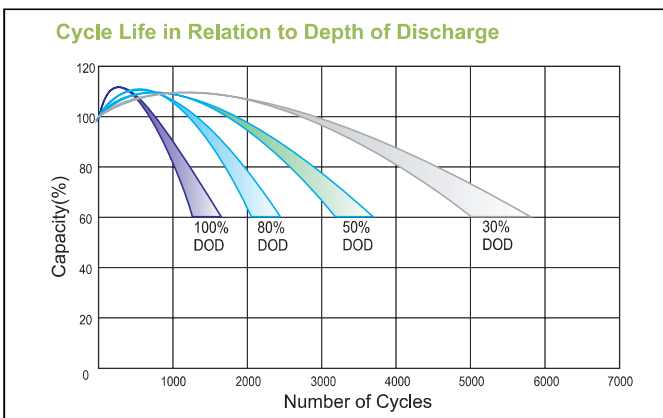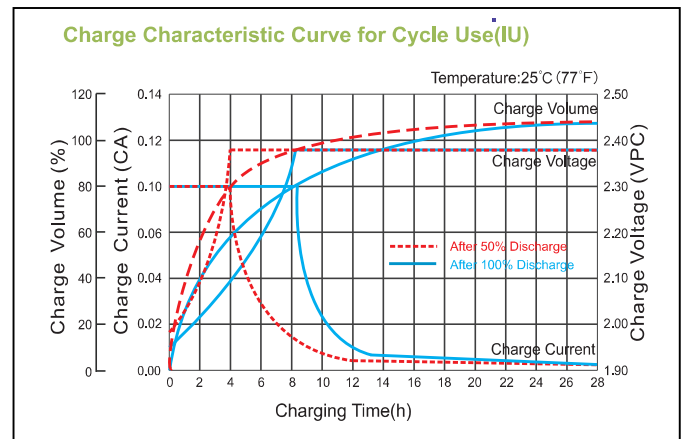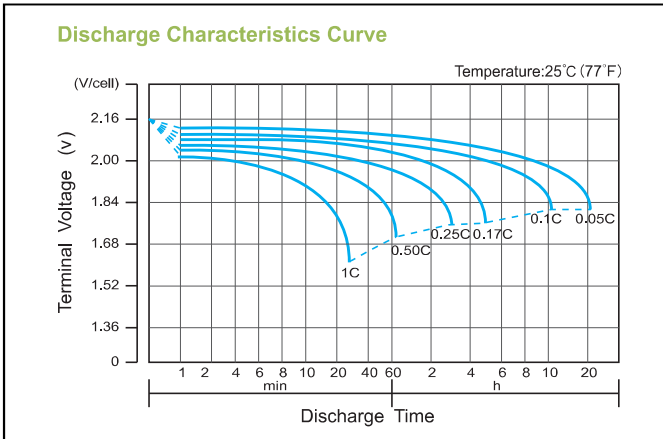

### Battery Discharge Capacity

Long time discharge capacity for solar/wind application						
Capacity	C24 (Ah)	C48 (Ah)	C72 (Ah)	C100 (Ah)	C120 (Ah)	C240 (Ah)
Model	F.V=1.85VPC					
OPzV2-2500	2732	3050	3080	3130	3181	3235

**Note:** The above data are average values, and can be obtained within 3 charge/discharge cycles. These are not minimum values. Cell and battery designs/specifications are subject to modification without notice. Contact **CSPower** for the latest information.

**CSPower Battery Tech Co., Ltd.**

Add: Floor 3, Evolution Space, NO.61, Liuxian 2nd Road, Baoan, Shenzhen, China  
Tel: +86-755-29123661 Email: sales@cspbattery.com



[WWW.CSPBATTERY.COM](http://WWW.CSPBATTERY.COM)